


**Austik**  
**2013 Diamond 10**

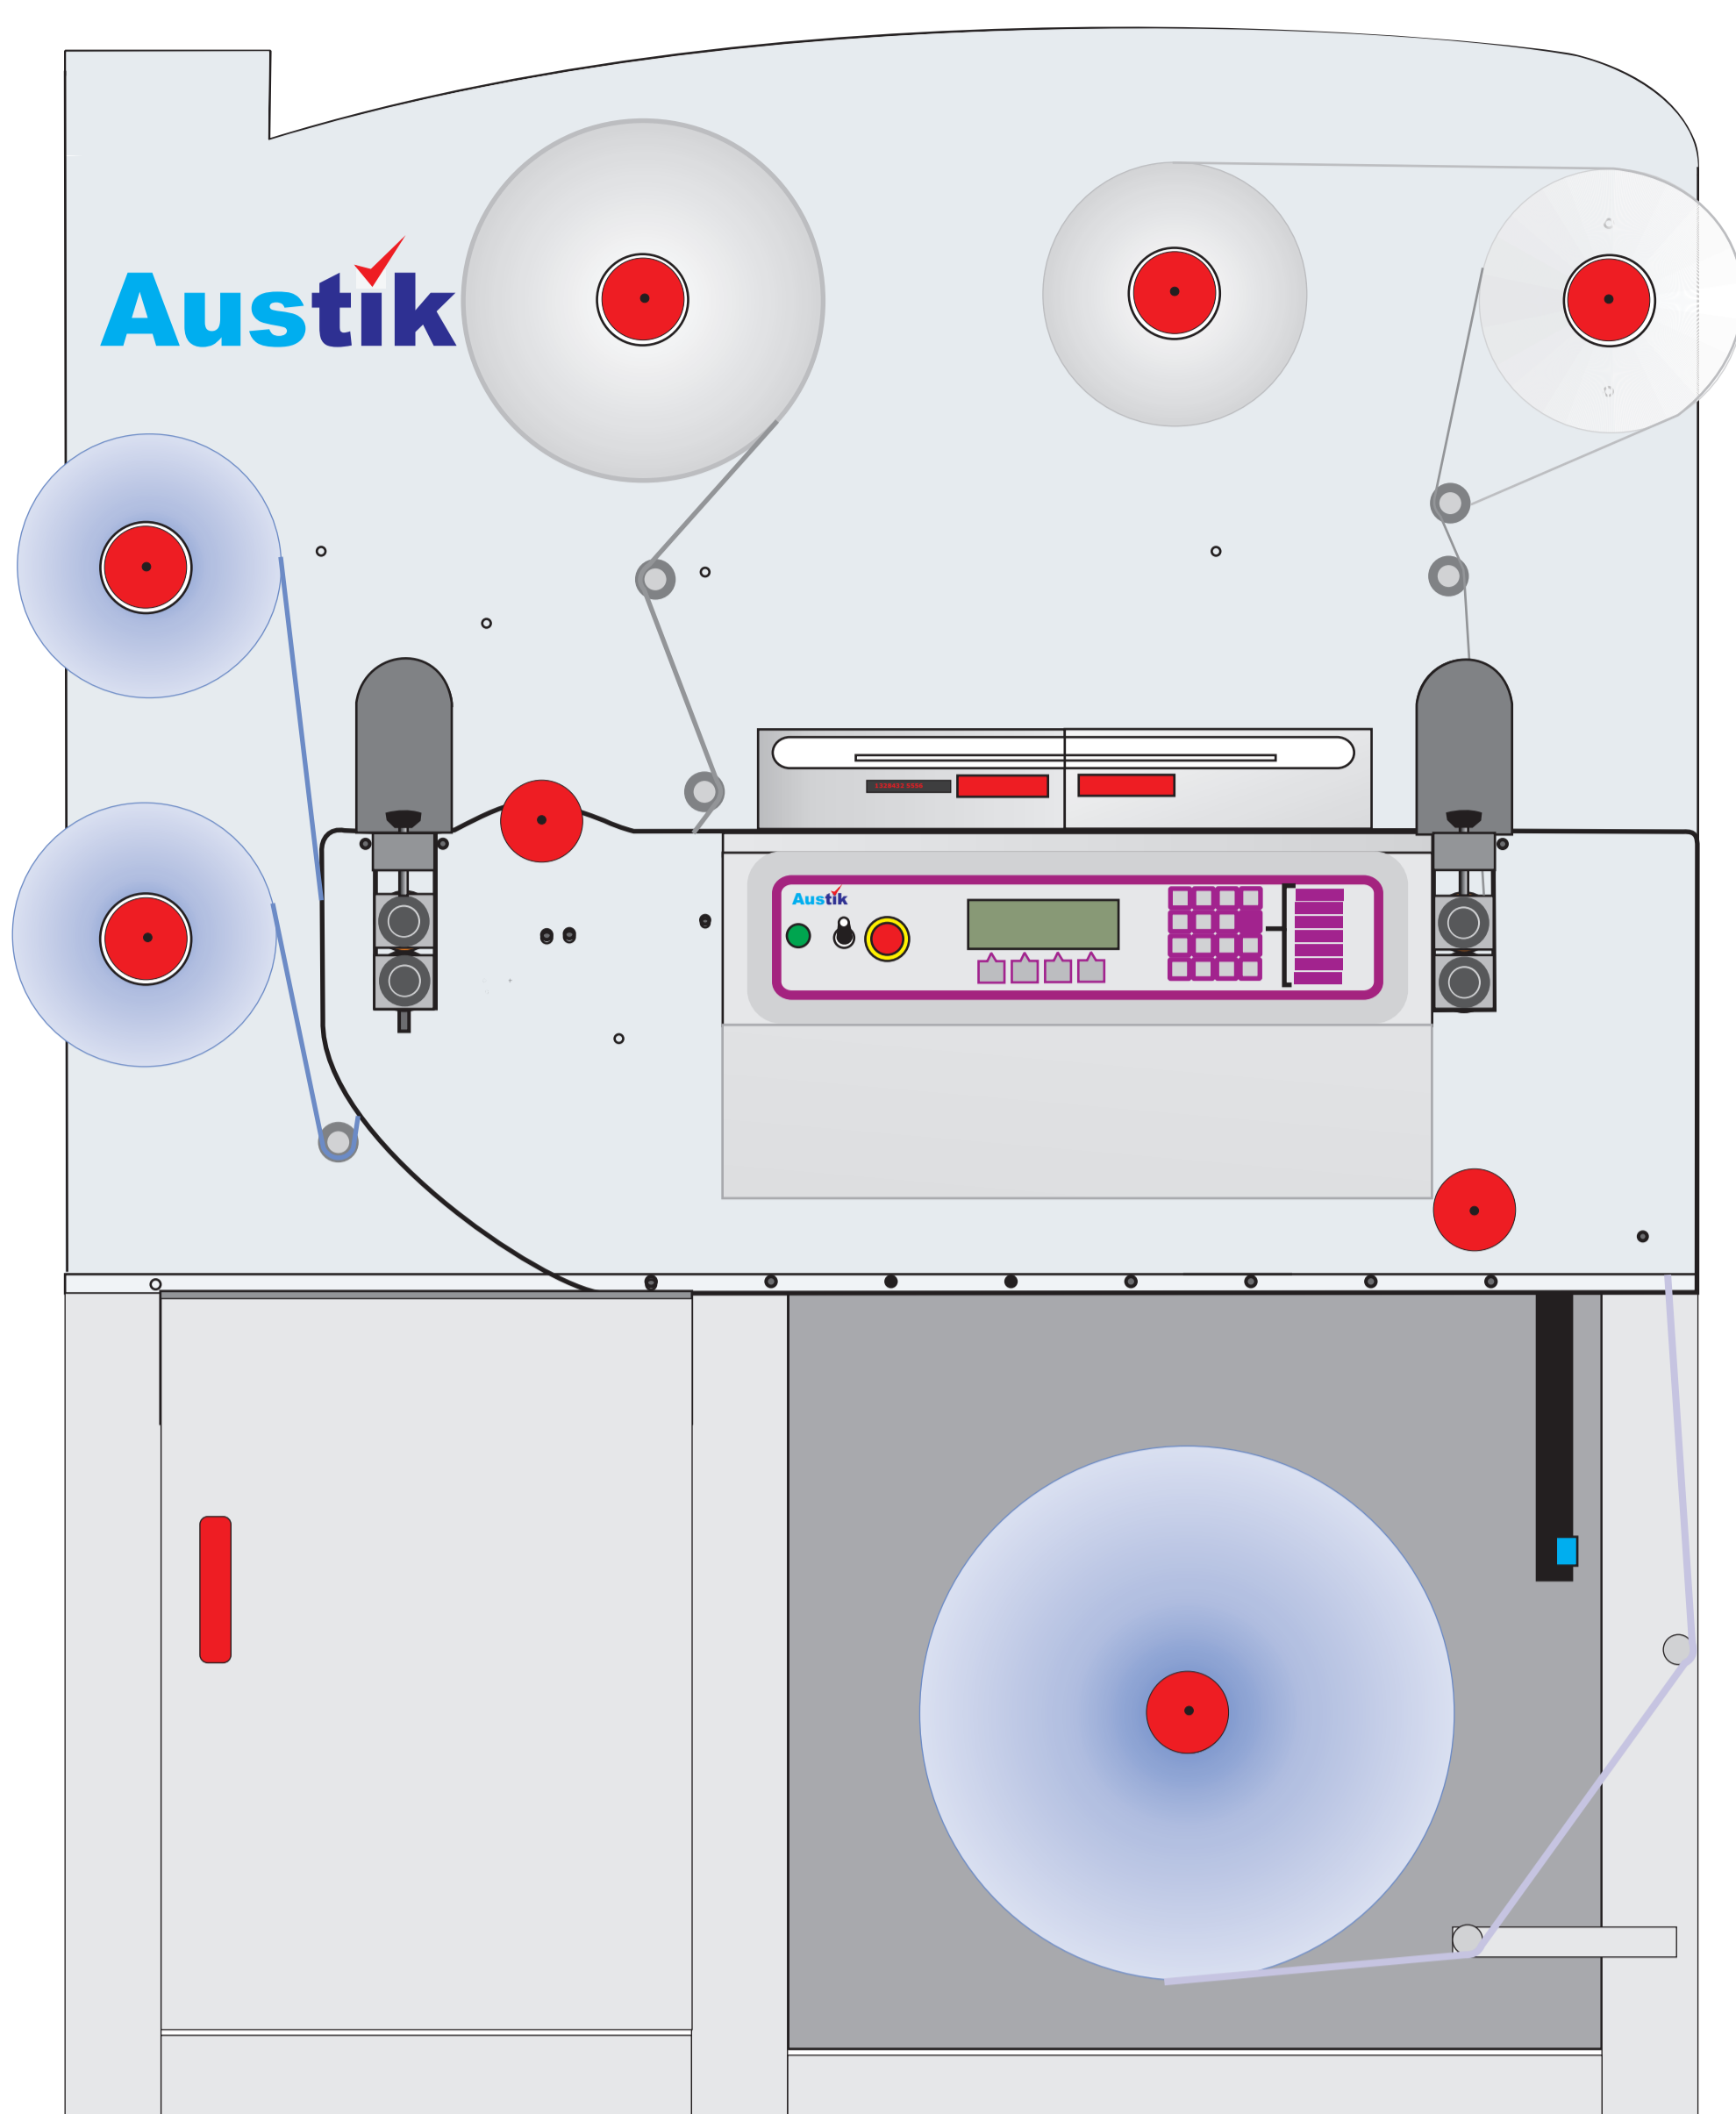

**STANDARD  
SPECIFICATIONS  
AND FEATURES**

- \*Maximum web width - 258mm
- \*Maximum Diecutting width - 250mm
- \*Maximum Diecutting length - 300mm
- \*Cutting dies - Flexible steel  
any size from 25mm - 300mm repeat
- \*Maximum laminate OD - 360mm
- \*Maximum finished label rewind - 250mm
- \*Maximum waste matrix rewind - 380mm
- \*Razor Slitter assembly - 4 knives standard
- \*Razor slitter lateral adjustment 12mm
- \*Powered Unwind - 440mm Maximum OD
- \*Registration sensor - Laser
- \*Registration sensor adjustment -300mm
- \*Sensor Mark - 5mm x 3mm
- \*Lateral paper adjustment - 12mm
- \*Splicing Table
- \*Laminate - Self wound & Lined.
- \*Core sizes - 76mm
- \*Dimensions - 1300W X 1820H X 830D
- \*Frame - 16mm solid aluminium
- \*Safety sensors - magnetic lid x 2
- \*Loop - photoelectric distance sensor
- \*Power - 110v/240v adjustable
- \*Amps - 7
- \*Registration - +/- .3mm
- \*Speed - Max 203mm/sec. Re-registering  
40MPM full rotary Blanks
- \*Variable speed control
- \*Weight - 262kgs net
- \*Motors - 3, 400w / 90w/ 60w
- \*Control - PCB. Inverter, Encoder  
servo system.

**OPTIONAL  
EXTRAS**

NONE All Standard

**DISTRIBUTED BY**